


Volkswagen > Jetta > 2005-2008

Body Exterior


66 - Removal and Installation

Roof Molding

Removing

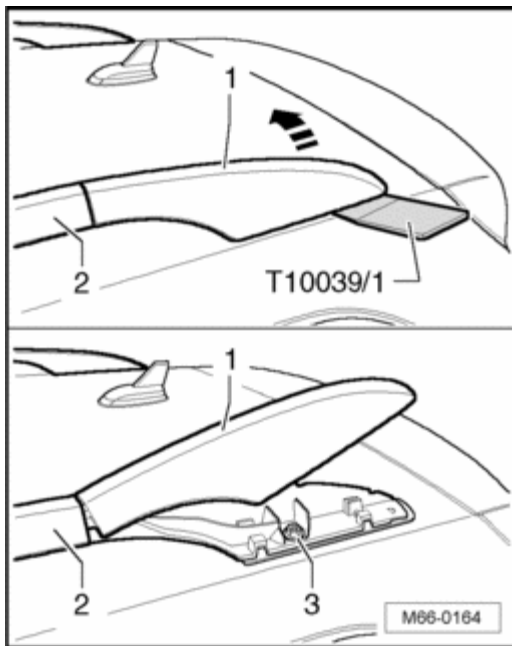

- Using the Trim Removal Wedge T10039/1 , pry the front and rear roof rail cover - **1** - in the - **direction of the arrow** - .
- Remove the bolt - **3** - on the front and rear roof rail mount - **2** - (20 Nm).

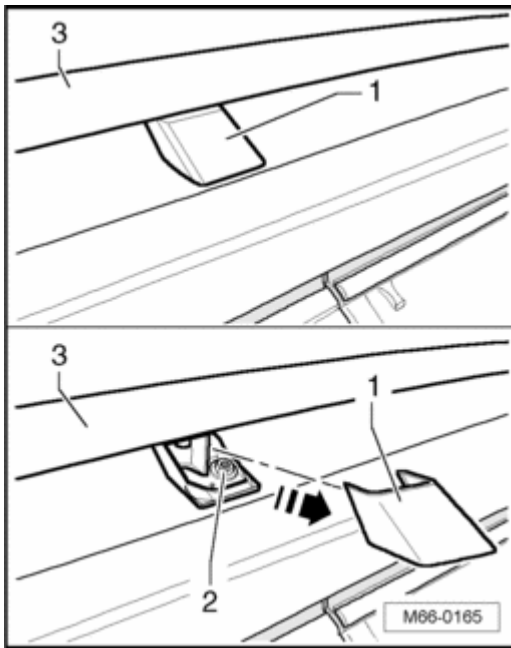

- Remove the center cover - **1** - from the roof rail - **3** - in the - **direction of the arrow** - .
- Remove the bolt - **2** - on the center roof rail mount - **3** - (20 Nm).

Installing

Installation is performed in the reverse order of removal.

Check for the roof railing cover for damage and replace if necessary.

Copyright © 2008 Volkswagen of America, Inc. and Bentley Publishers. All rights reserved. Last processed: